


Quick-Fit® Thread Adapters, Brass, Nickel plated

Used to adapt from metric external thread up to PG internal thread and from PG external thread up to metric internal thread

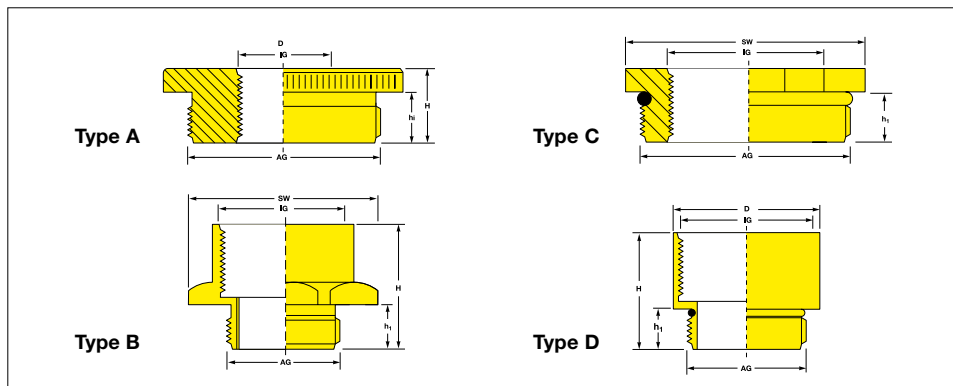

Metric → PG

All dimensions in mm

| from | to | Form | Spanner size | Ø outside | Height | Thread length | Reference-No. |
|-----------------|-----------------|------|--------------|-----------|--------|----------------|--------------------------|
| Thread external | Thread internal | | | | | | |
| AG | IG | | SW | D | H | h ₁ | |
| M 12 | PG 7 | B | SW 14 | - | 16.0 | 6.0 | EPN 750 / M 12 → PG 7 |
| M 12 | PG 9 | D | - | 17.0 | 16.0 | 5.0 | EPN 750 / M 12 → PG 9 |
| M 16 | PG 7 | C | SW 17 | - | 8.0 | 5.0 | EPN 750 / M 16 → PG 7 |
| M 16 | PG 9 | B | SW 18 | - | 17.5 | 7.0 | EPN 750 / M 16 → PG 9 |
| M 16 | PG 11 | D | - | 20.0 | 16.5 | 5.0 | EPN 750 / M 16 → PG 11 |
| M 20 | PG 9 | C | SW 22 | - | 9.1 | 5.9 | EPN 750 / M 20 → PG 9 |
| M 20 | PG 11 | B | SW 22 | - | 18.0 | 6.4 | EPN 750 / M 20 → PG 11 |
| M 20 | PG 13.5 | B | SW 22 | - | 19.0 | 6.5 | EPN 750 / M 20 → PG 13.5 |
| M 20 | PG 16 | D | - | 24.0 | 19.5 | 6.0 | EPN 750 / M 20 → PG 16 |
| M 25 | PG 9 | C | SW 27 | - | 10.0 | 7.0 | EPN 750 / M 25 → PG 9 |
| M 25 | PG 11 | A | - | 30.0 | 12.0 | 8.0 | EPN 750 / M 25 → PG 11 |
| M 25 | PG 13.5 | A | - | 30.0 | 10.0 | 7.0 | EPN 750 / M 25 → PG 13.5 |
| M 25 | PG 16 | B | SW 27 | 30.0 | 18.1 | 7.0 | EPN 750 / M 25 → PG 16 |
| M 25 | PG 21 | D | - | 30.0 | 22.5 | 7.0 | EPN 750 / M 25 → PG 21 |
| M 32 | PG 13.5 | C | SW 34 | - | 11.0 | 8.0 | EPN 750 / M 32 → PG 13.5 |
| M 32 | PG 16 | A | - | 39.0 | 11.5 | 8.0 | EPN 750 / M 32 → PG 16 |
| M 32 | PG 21 | C | SW 34 | - | 11.1 | 8.0 | EPN 750 / M 32 → PG 21 |
| M 32 | PG 29 | D | - | 39.0 | 25.0 | 8.0 | EPN 750 / M 32 → PG 29 |
| M 40 | PG 16 | C | SW 43 | - | 12.0 | 8.0 | EPN 750 / M 40 → PG 16 |
| M 40 | PG 21 | C | SW 43 | - | 12.0 | 8.0 | EPN 750 / M 40 → PG 21 |
| M 40 | PG 29 | C | SW 43 | - | 12.0 | 8.0 | EPN 750 / M 40 → PG 29 |
| M 40 | PG 36 | D | - | 50.0 | 27.5 | 8.0 | EPN 750 / M 40 → PG 36 |
| M 50 | PG 21 | C | SW 55 | - | 13.0 | 9.0 | EPN 750 / M 50 → PG 21 |
| M 50 | PG 29 | A | - | 57.0 | 12.0 | 9.0 | EPN 750 / M 50 → PG 29 |
| M 50 | PG 36 | C | SW 55 | - | 13.1 | 9.0 | EPN 750 / M 50 → PG 36 |
| M 50 | PG 42 | D | - | 57.0 | 31.0 | 9.0 | EPN 750 / M 50 → PG 42 |
| M 50 | PG 48 | D | - | 64.0 | 32.0 | 9.0 | EPN 750 / M 50 → PG 48 |
| M 63 | PG 29 | C | SW 65 | - | 14.0 | 10.0 | EPN 750 / M 63 → PG 29 |
| M 63 | PG 36 | A | - | 70.0 | 14.5 | 10.5 | EPN 750 / M 63 → PG 36 |
| M 63 | PG 42 | A | - | 70.0 | 14.5 | 10.5 | EPN 750 / M 63 → PG 42 |
| M 63 | PG 48 | B | SW 65 | - | 33.0 | 10.0 | EPN 750 / M 63 → PG 48 |

Material :
Brass,
nickel plated

Used to adapt from external
EN 60423 metric to internal
DIN 40430 PG threaded ports.

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Thread Adapters, Brass, Nickel plated

Used to adapt from metric external thread up to PG internal thread and from PG external thread up to metric internal thread

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. This component alters the threaded entry diameter on any threaded connector with incompatible thread forms.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



PG → Metric

| from | to | All dimensions in mm | | | | | Reference-No. |
|-----------------|-----------------|----------------------|--------------|--------|----------------|--------------------------|---------------|
| Thread external | Thread internal | Form | Spanner size | Height | Thread length | | |
| AG | IG | | SW | H | h ₁ | | |
| PG 7 | M 12 | B | SW 14 | 15.0 | 5.0 | EPN 750 / PG 7 → M 12 | |
| PG 9 | M 16 | B | SW 19 | 16.0 | 6.0 | EPN 750 / PG 9 → M 16 | |
| PG 11 | M 16 | B | SW 22 | 16.0 | 6.0 | EPN 750 / PG 11 → M 16 | |
| PG 13.5 | M 20 | B | SW 24 | 17.0 | 7.0 | EPN 750 / PG 13.5 → M 20 | |
| PG 16 | M 20 | B | SW 27 | 17.5 | 6.5 | EPN 750 / PG 16 → M 20 | |
| PG 16 | M 25 | B | SW 27 | 18.0 | 7.0 | EPN 750 / PG 16 → M 25 | |
| PG 21 | M 25 | A | – | 10.0 | 7.0 | EPN 750 / PG 21 → M 25 | |
| PG 21 | M 32 | B | SW 36 | 19.5 | 8.0 | EPN 750 / PG 21 → M 32 | |
| PG 29 | M 40 | B | SW 42 | 20.0 | 8.5 | EPN 750 / PG 29 → M 40 | |
| PG 36 | M 50 | B | SW 55 | 21.0 | 8.5 | EPN 750 / PG 36 → M 50 | |
| PG 42 | M 63 | B | SW 65 | 25.0 | 10.0 | EPN 750 / PG 42 → M 63 | |

Material :
Brass,
nickel plated

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.